


Technical Specifications

Pump Model	BA150E D285
Pump Type	Electric
Width	1040mm
Length	2270mm
Height	1340mm
Dry Weight	1400kg
Inlet Diameter	8 inch (200mm)
Outlet Diameter	8 inch (200mm)
Solids Handling	80mm diameter
Motor	Hoyer HMC3 180L-4
Power kW (HP)	22kW (30HP)
Voltage	400/690V 50Hz
Motor Speed	1475rpm
Max. flow	430 m ³ /hr (119l/s)
Max. head	24 mwc
Control panel	Star-Delta/Soft starter/VFD
Medium	Liquid, Sewage

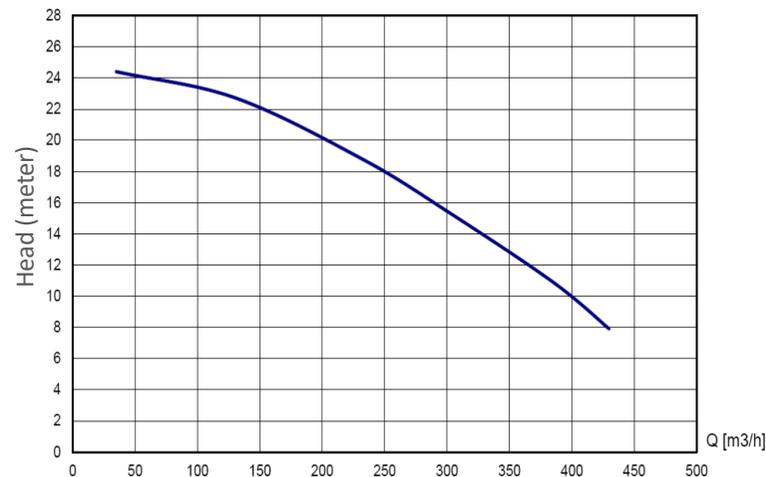

Flow @ 1475rpm (m³/hour)

BA150E Electric Pump Specification

The BA150E is an extremely efficient dewatering and sewage pump. It offers one of the best pump capacity to efficiency ratios in the market.

It offers pumping capacity up to 119l/s and discharge head capacity of up to 24m. Using high efficiency pumps and electric motors, the pumps offer maximum performance.

This makes it the pump of choice for over pumping, bypass and diversion jobs where discharge heads are relatively low.

WJ Middle East have successfully used the BA150E for diverting sewage at several pumping stations, finding that the semi-open impeller is extremely resistant to blocking from rags and debris.

Featuring the 100% mechanical priming system, the BA150E quickly prime and re-prime, even from dry conditions.

Contact us today for more information.

*Available for hire with operator.

*Available with Zone 2 Specifications for Oil & Gas Applications.

www.wj-me.com

info@wj-me.com