



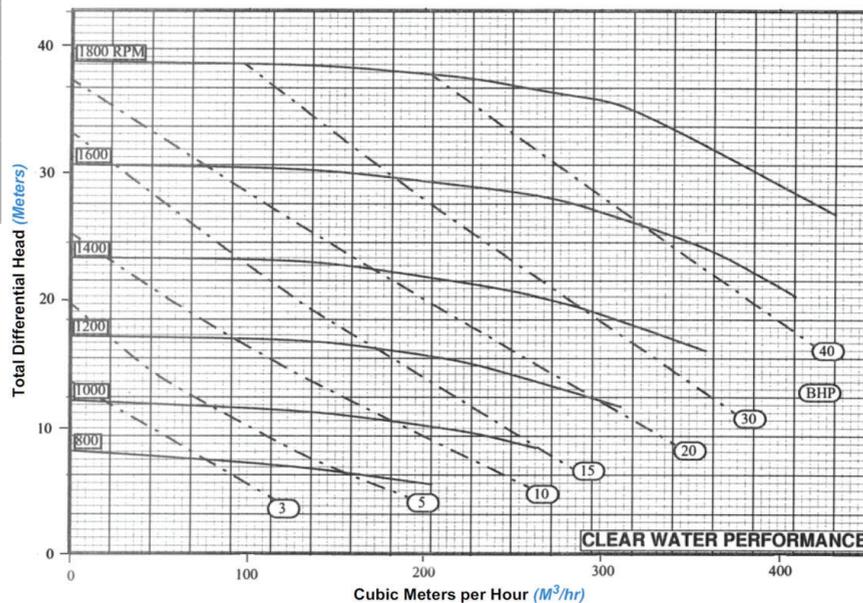

WJ Middle East
Expert in Water Management

Technical Data

Model of pump	FET86
Type of pump	Diesel
Width	1300mm
Length	3250mm
Height	1700mm
Dry weight	2500kg
Inlet diameter	10 inch (250mm)
Outlet diameter	8 inch (200mm)
Solids handling	25 mm diameter
Engine	CAT C6.6 89kW
Maximum flow	400m ³ /hr
Maximum head	35m
Maximum operation speed	1800rpm
Medium	Water, Stormwater

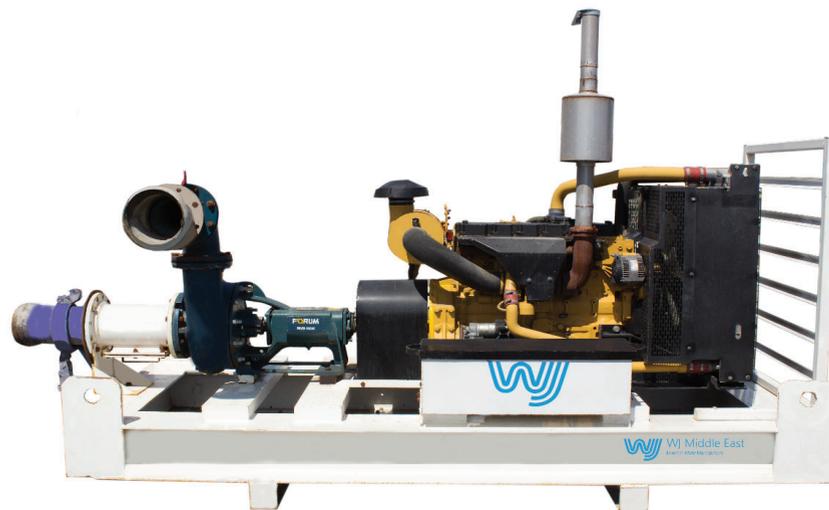

FET86 Diesel Pump Specification

The FET86 is a reliable diesel surface pump specifically designed for pumping slurries. It is made from hard wearing materials suitable for pumping solid laden liquids. It is ideal for booster pumping water and other fluids.

A prime assist vacuum unit can be fitted with notice.

It offers pumping capacity up to 400m³/hr and discharge head up to 35m.

The FET86 featuring a superior-quality bearing configuration, provides improved stability and lower vibration that increases their working life expectancy and can be used for pumping drilling mud as well.

The pump offers a high level of fuel efficiency and brings fuel saving to your projects.

Call WJ Middle East today for more info.

*Available for hire with operator and accessories including valves, NRV, hoses, flow meter and filtration pods.

www.wj-me.com
info@wj-me.com

WJ-EQ-PUMP-SPEC-FET86