




# HL250M Diesel Pump Specification


## Technical Data

Model of pump	HL250M
Type of pump	Diesel Pump
Width	1980mm
Length	4000mm
Height	2345mm
Dry weight	7,000kg
Inlet diameter	12 inch (300mm)
Outlet diameter	10 inch (250mm)
Solids handling	65 mm diameter
Engine	Caterpillar C-15 315kW
Fuel consumption	77 lph @2000 rpm
Maximum flow	1100m <sup>3</sup> /hr (310 l/s)
Maximum dynamic head	110 m
Maximum operation speed	Engine: 2000rpm
Maximum working pressure	12.1 BAR
Maximum suction pressure	6.0 BAR
Medium	Liquid, slurry


## Performance

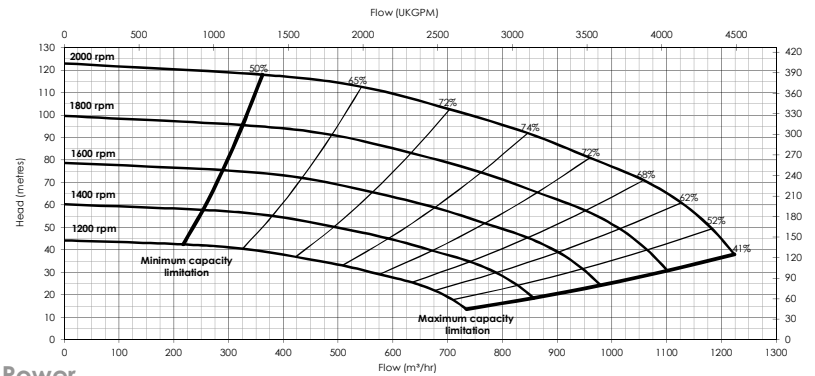

## Power

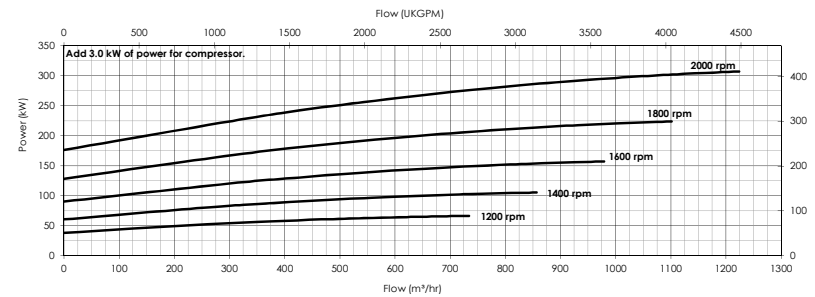

## NPSH

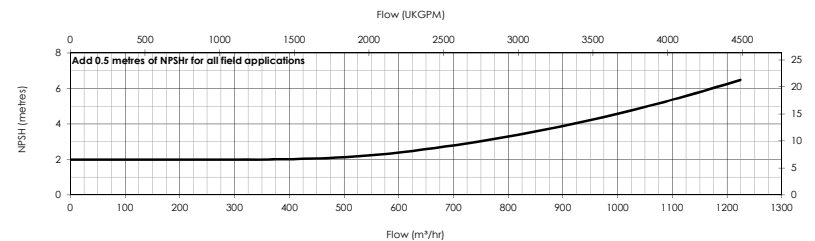

The HL250M is a high volume and high head diesel surface pump ideal for all your flushing and cleaning projects.

It offers pumping capacity up to 310/s, discharge head up to 110m, and solids handling to 65mm in diameter.

Call WJ Middle East today for more info.

\*Available for hire with operator and accessories including valves, NRV, hoses, flow meter and filtration pods.

