




WJ Middle East
Expert in Water Management

Technical Data	
Model of pump	SULZER XFP315M
Type of pump	Electric
Width	1600mm
Length	2500mm
Height	1000mm
Dry weight	2500kg
Inlet diameter	14 inch (350mm)
Outlet diameter	14 inch (350mm)
Solids handling	110mm
Motor	90kw 6 Pole
Maximum flow	2160m ³ /hr
Maximum head	20m
Control Panel	VFD Panel
Medium	Water, Sludge, Sewage, Stormwater

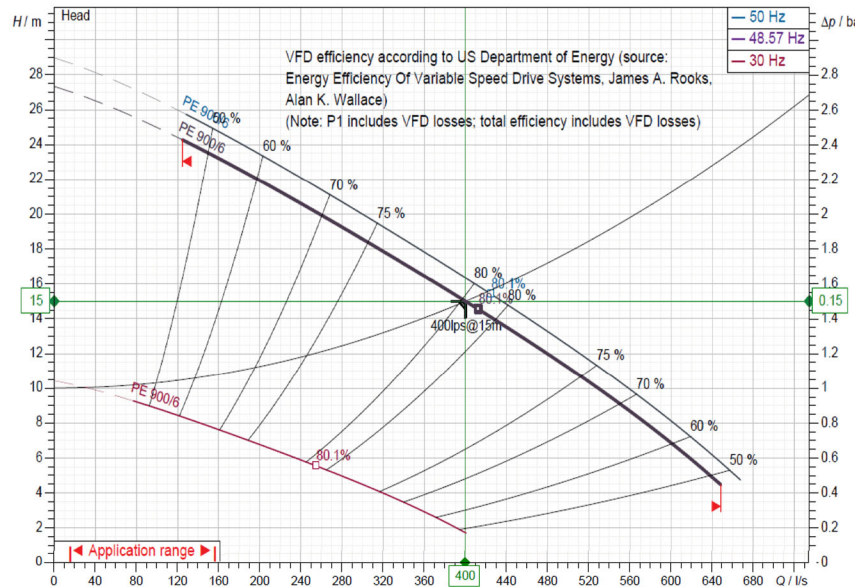

Sulzer XFP315M Pump Specification

The XFP315M is high flow volume electric pump ideal for your project.

This pump comes in Two Variants - Surface Pump with in built Self Priming capabilities and as a Submersible Pump that can be immersed in the pumping medium.

The XFP315M is suitable for use on sewage bypass works as the pump is capable to handle 110mm solids in diameter.

It is especially designed to handle sludge as well with viscosity of 0.712mm²/sec. It offers pumping capacity up to 600/s, discharge head up to 20m.

This pump comes along with 90kw VFD drive to achieve varying flow and head applications.

Call WJ Middle East today for more info.

*Available for hire with operator and accessories including valves, NRV, hoses, flow meter and filtration pods.

www.wj-me.com
info@wj-me.com