




WJ Middle East
Expert in Water Management

Technical Data

Model of pump	PP64C21
Type of pump	Diesel
Width	1500mm
Length	3700mm
Height	2200mm
Dry weight	4100kg
Inlet diameter	6 inch (150mm)
Outlet diameter	4 inch (100mm)
Solids handling	20mm diameter
Engine	Caterpillar C9 205kW
Maximum flow	280m ³ /hr
Maximum head	160m
Maximum operation speed	1800rpm
Best Efficiency Percentage	62%
Priming Vacuum Capacity	50cfm
Medium	Oil & Gas, Industrial, Petrochemical

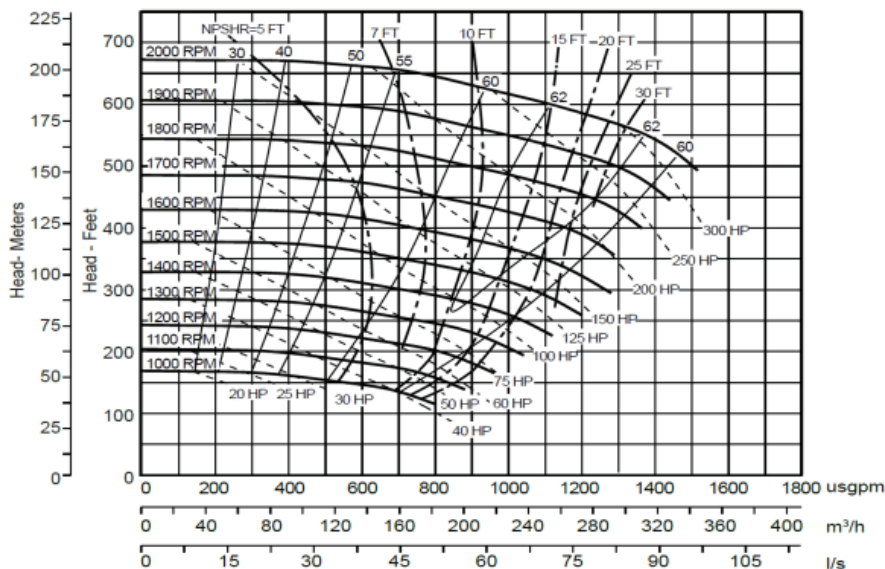

PP64C21 Diesel Pump Specification

The PP64C21 is a high pressure, high flow, heavy duty surface pump ideal for your project.

Designed to operate over broad range of performance while delivering outstanding suction lift.

The rugged construction and modular design provide proven reliability and flexibility in the most demanding application.

Application:
Contaminated Effluents, Trench and Tunnel Water, Drainage Water, Sewage Water, Stormwater, Fire fighting & Petrochemical

The pump offers a high level of fuel efficiency and brings fuel saving to your projects.

Call WJ Middle East today for more info.

*Available for hire with operator and accessories including valves, NRV, hoses, flow meter and filtration pods.

www.wj-me.com
info@wj-me.com